

710 BUS SPLITTER/REPEATER MODULE

Installation Guide




Figure 1: 710 Module

DESCRIPTION

The 710 Bus Splitter/Repeater Module expands the total number of devices and the total wire length on the LX-Bus or Keypad Bus.

As a splitter, the module provides superior wire connection capability for up to three additional 12 VDC LX-Bus or Keypad Bus circuits. The module's additional circuits also makes it an excellent junction box when terminating multiple LX-Bus or Keypad Bus runs at one location.

As a repeater, the module can be installed at the end of an LX-Bus or Keypad Bus circuit to increase the total wire length as an additional circuit.

The 710 Bus Splitter/Repeater Module is suitable for listed burglary and fire applications. For more information, refer to "Certifications".

Compatibility

- All DMP XT and XR Series panels
- All DMP XT and XR Series International panels
- All DMP LX-Bus and Keypad Bus Devices

What is Included?

- One 710 Splitter/Repeater Module in Universal Housing
- Hardware pack



1 MOUNT THE MODULE

The 710 comes in a high-impact plastic housing that you can mount directly to a wall, backboard, or other flat surface. For easy installation, the back of the housing contains multiple holes that allow you to mount the module on a single-gang switch box or ring. The module can also be mounted in a DMP enclosure using the standard 3-hole mounting pattern. Refer to Figure 2 and Figure 3 as needed during installation.

1. Hold the plastic standoffs against the inside of the enclosure side wall.
2. Insert the included Phillips head screws from the outside of the enclosure into the standoffs. Tighten the screws.
3. Carefully snap the module onto the standoffs.

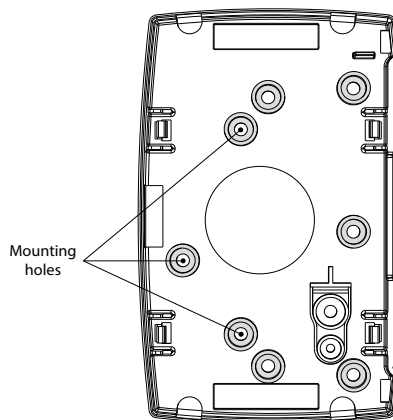


Figure 2: Mounting Hole Locations

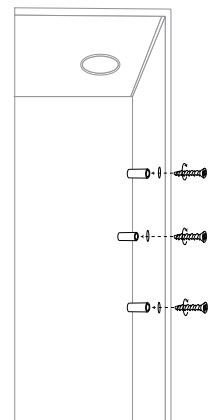


Figure 3: Standoff Installation

2 WIRE THE MODULE

Use 18 to 22 AWG wire to connect the module directly to the Keypad Bus or use a dual-ended 4-wire harness to connect directly to the LX-Bus. This connection allows the module to communicate with the panel and receive 12 VDC power. Refer to Figure 4 when wiring the module.

When using an auxiliary power supply, do not connect the red wire between the panel and first device. Refer to Figure 7.

Connect to the LX-Bus

At the module, connect wires to the RED, YEL, GRN, and BLK terminals. Connect the red, yellow, green, and black wires to the corresponding 4-wire harness leads. Connect the other end of the harness to the LX-Bus header.

Connect to the Keypad Bus

At the module, connect wires to the RED, YEL, GRN, and BLK terminals. Connect the red, yellow, green, and black wires to panel Terminal 7, 8, 9, and 10 respectively.

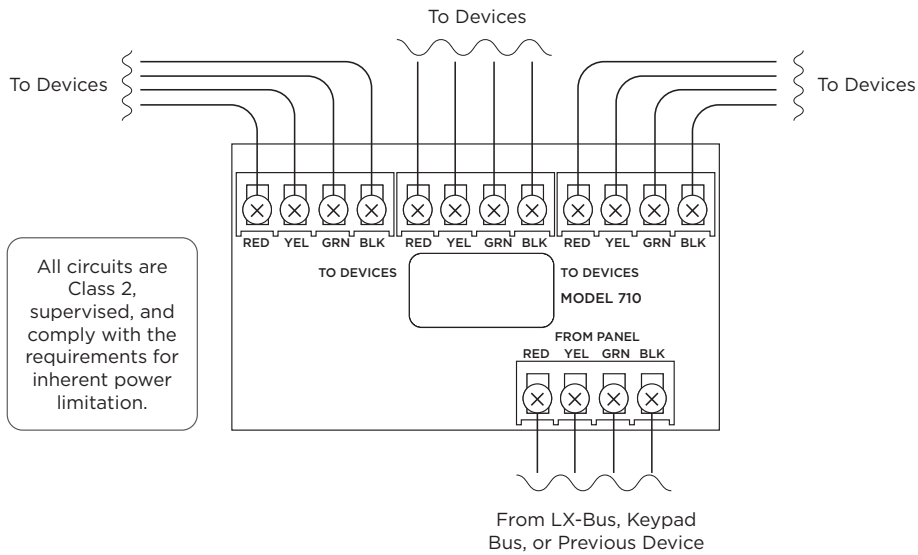


Figure 4: Module Wiring Diagram

Measure Voltage Drop

The maximum voltage drop between the panel and any device connected to the LX-Bus or Keypad Bus is 2.0 VDC. For example, when the voltage across the red and black wires at the panel reads 13.8 VDC, the voltage measured at each device must be equal to or greater than 11.8 VDC. For more information, refer to Figure 5 and Figure 6.

If the voltage at any device, including a 710 module, is less than the required level, add an auxiliary power supply to the circuit. Increasing the wire gauge used on the circuit can reduce the voltage drop. The maximum voltage drop rule applies to LX-Bus circuits and Keypad data bus circuits powered either by the panel or by an auxiliary power supply. For more information, refer to Figure 7.

Note: To troubleshoot voltage drop, read the voltage at the last device on the LX-Bus or Keypad Bus.

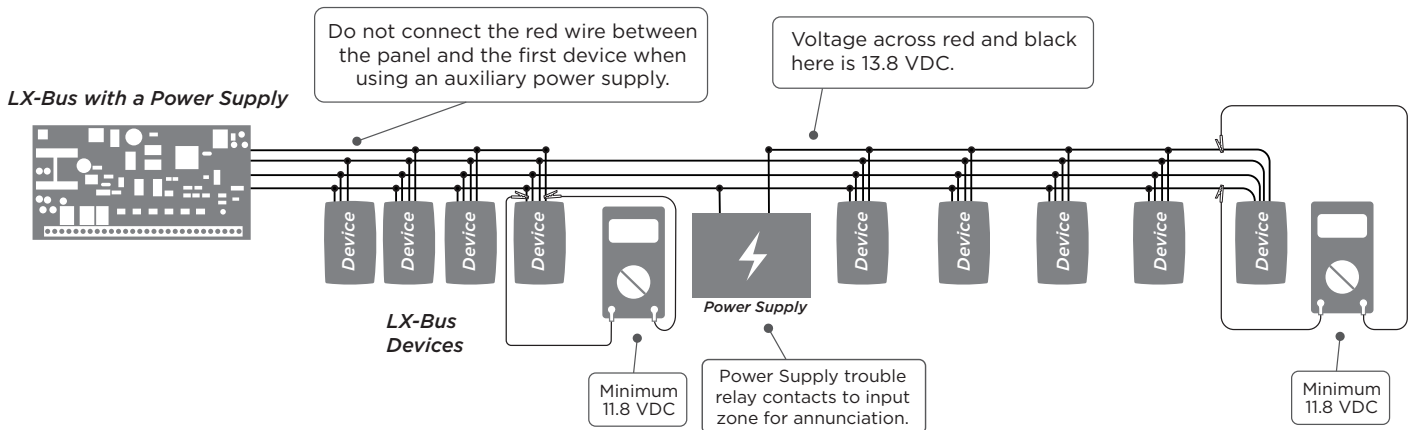


Figure 5: Measuring Voltage Drop for LX-Bus with Power Supply

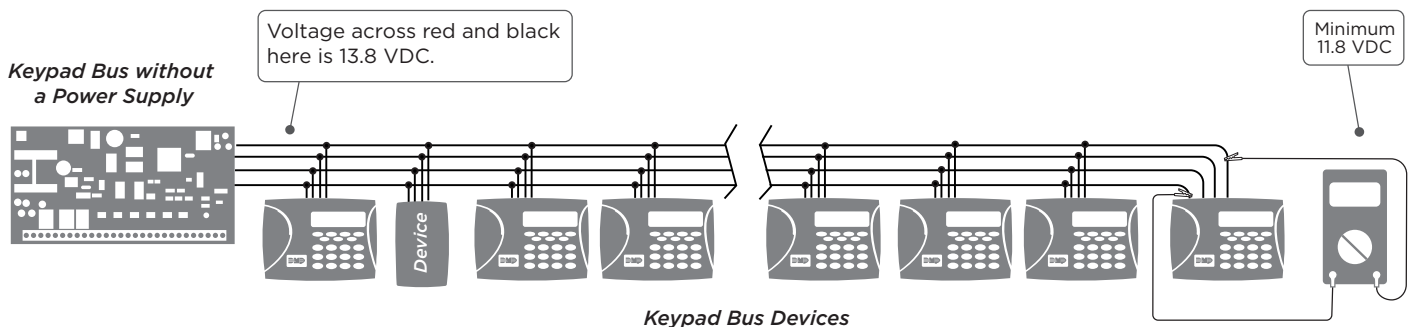


Figure 6: Measuring Voltage Drop for Keypad Bus without Power Supply

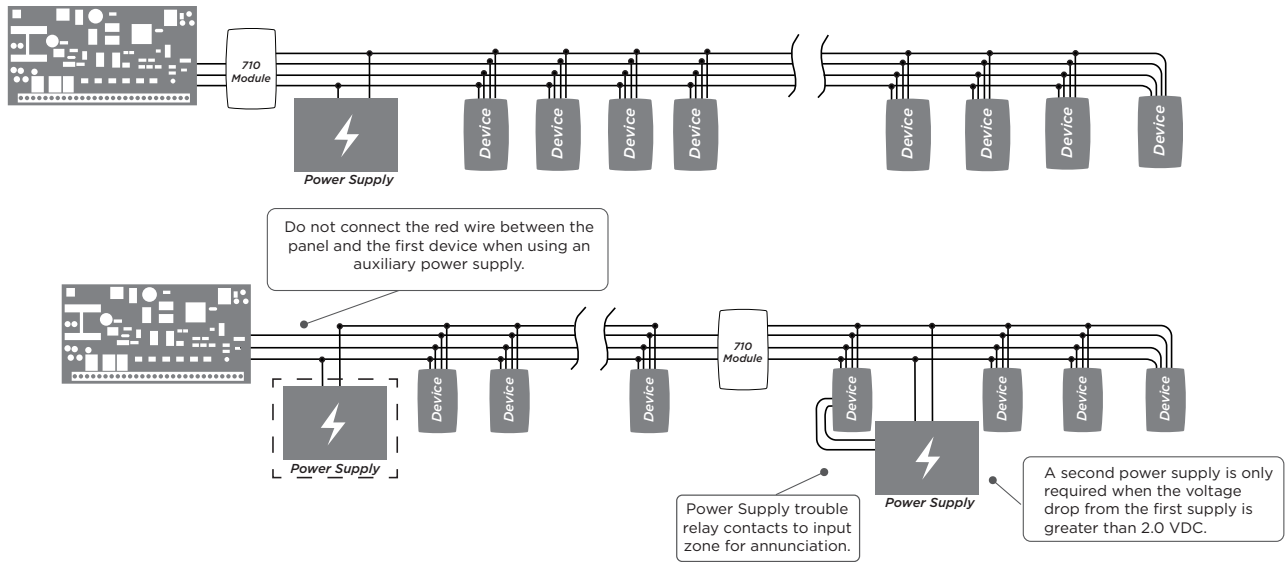


Figure 7: Installing Optional Power Supplies

Wire Multiple Circuits

In this example the first 710 module is in close proximity to the panel. At this point, the module is used to branch the LX-Bus or Keypad Bus into three separate circuits. Each of these circuits can be run a distance of 2,500 feet (762 meters). At the end of the 2,500 feet (762 meters), install another 710 module to add another 2,500 feet (762 meters) of LX-Bus/Keypad Bus capability. For more information, refer to Figure 8.

Note: The total combined distance of all circuits cannot exceed 15,000 feet (4572 meters). Do not install more than 40 devices per each 2,500 ft. run.

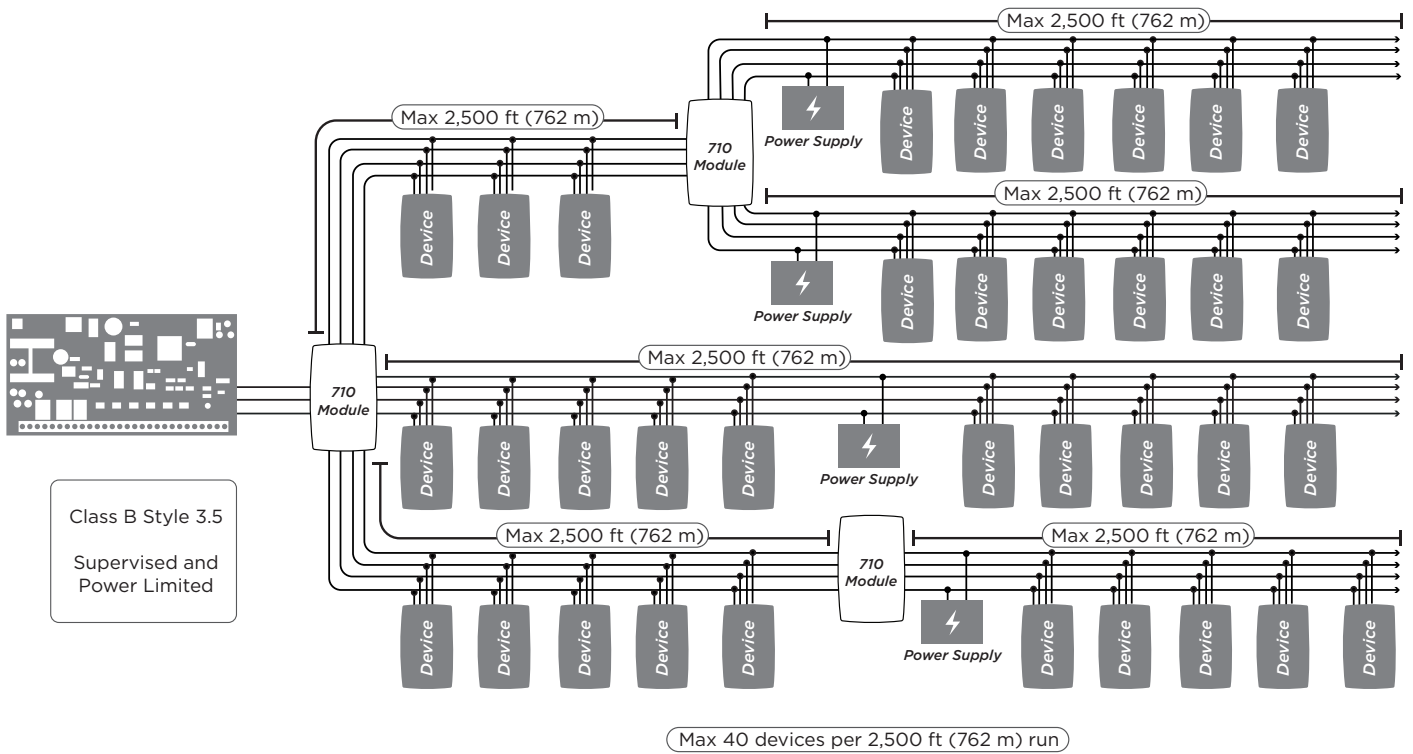


Figure 8: Wiring Multiple Circuits

ADDITIONAL INFORMATION

Use the Module as a Junction Box

To use the 710 as a junction box, add the module to the LX-Bus or Keypad Bus circuit close to any large grouping of devices. The module enables connection to three separate wire runs to the main LX-Bus or Keypad Bus. In this application, wire nuts or other mechanical connectors are not required as all wiring terminates on the module screw terminals. For more information, refer to Figure 9.

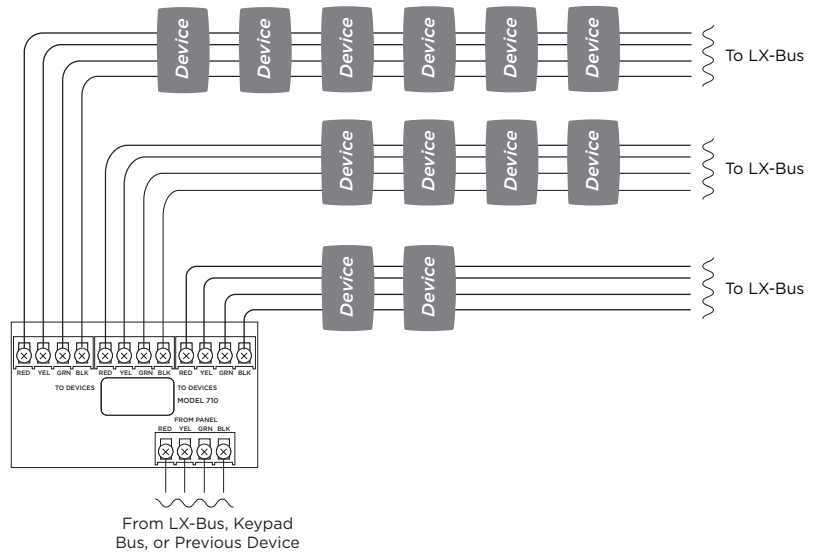


Figure 9: Using the Module as a Junction Box

710 BUS SPLITTER/ REPEATER MODULE

Specifications

Current Draw	
Voltage Range	8.0 VDC to 14.5 VDC
710 Module	32 mA
Dimensions	4.5" W x 2.75" H x 1.75" D 11.4 cm W x 7.0 cm H x 4.5 cm D
Wire Specification	Accepts 12 to 22 AWG wire

Ordering Information

710	Bus Splitter/Repeater Module
710INT	International Bus Splitter/Repeater Module

Compatibility

XT30/XT50 and XR150/XR550 Series panels
XT30INT/XT50INT and XR150INT/XR550INT Series panels


Certifications

California State Fire Marshal (CSFM)

New York City (FDNY COA #6167)

Underwriters Laboratory (UL) Listed

ANSI/UL 365	Police Station Connect Burglar Alarm Systems
ANSI/UL 609	Local Burglar Alarm Units & Systems
ANSI/UL 864	Fire Protective Signaling Systems
ANSI/UL 985	Household Fire Warning System
ANSI/UL 1023	Household Burglar Alarm System Units
ANSI/UL 1076	Proprietary Burglar Alarm Units & Systems
ANSI/UL 1610	Central Station Burglar Alarm Units
ANSI/UL 1635	Digital Alarm Communication System Units
ULC/ORD-C1023	Household Burglar
ULC/ORD-C1076	Proprietary Burglar
CAN/ULC S304	Central Station Burglar
CAN/ULC S545	Household Fire



International Certifications

Security Grade: 3

Environmental Class:II

Intertek (ETL) Listed

EN 50130-4	EMC Product Family Standard: Immunity Requirements for Components of Fire, Intruder and Social Alarm Systems
EN 50130-5	Environmental Standards
EN 50131-1:2006+A1	Intrusion and hold-up systems
EN 50131-3:2009	Control and Indicating Equipment
EN 50133-1:1997	Access Control Systems
EN 61000-3-2	Limits - Limits for Harmonic Current Emissions (Equip.Input Current up to and Including 16 A per Phase) Includes A1 & A2 July 1, 2009
EN 61000-3-3	Limitation of Voltage Fluctuations & Flicker in Low-Voltage Supply Systems for Equip. with Rated Current Less Than or Equal to 16 A per Phase & Not Subject to Conditional Connection
EN 61000-6-4	Generic Standards - Emission Standard for Industrial Environments



Designed, engineered, and manufactured in Springfield, MO using U.S. and global components.

LT-0310 1.04 20145

© 2020

INTRUSION • FIRE • ACCESS • NETWORKS

2500 North Partnership Boulevard
Springfield, Missouri 65803-8877

Domestic: 800.641.4282 | International: 417.831.9362

DMP.com