

V-RC8021 Indoor Video Camera

Description

The DMP V-RC8021 is an indoor wired/wireless video camera that allows live view and recorded clips through the Virtual Keypad App, as well as email motion-triggered video clip notification. To install and activate the camera, you need an active dealer account at vk.securecomwireless.com.

Compatibility

- Any DMP system with an active Virtual Keypad App

What is Included:

- V-RC8021 Indoor Camera
- Camera Mounting Base
- Antenna for wireless use
- 5V Power Transformer (for 9' power extender, order V-DCEXT-9 separately)
- Mounting Screws

Assembling the Camera

1. Attach the camera to the base if necessary for the installation.
2. Attach the antenna if using wireless connectivity.

Camera Configuration Options

The V-RC8021 can be configured to communicate to the SecureCom Video server in three ways:

Option #1 - Wired connection

Option #2 - Wireless connection using DMP V-IP1006RR Wireless Access Point (WAP) with WiFi Protected Setup (WPS)

Option #3 - Wireless connection using a WPS enabled WAP

Option #1 Configuration - Wired connection:

1. **IMPORTANT:** Before plugging in power to the camera, plug an Ethernet cable with an active internet connection into the Ethernet port.

Recommendation: We recommend marking the Ethernet cable from the customer's router to the WAP to help in network troubleshooting. If the end-user is having network issues after the install, you can instruct them to remove the marked Ethernet cable and see if the problem still exists. If it does, then they can contact their Internet service provider.




2. Once the Ethernet is plugged in, plug in the power adapter to the camera and to a power outlet. When the camera is fully powered on and finds an active network, the power LED turns on solid. The Network LED continues to flash green to indicate network activity.

The camera is now ready to be activated through vk.securecomwireless.com.

Option #2 Configuration - Wireless connection using DMP V-IP1006RR WAP:

For best results, establish communication while the WAP and cameras are no more than 20 ft from each other. After communication is established, place them in their desired location to ensure that they are still within wireless range of the WAP. Multiple WAPs can be installed for larger installations.

1. Plug in the power adapter to the camera and to a power outlet. The Power LED continues to flash until it is paired with the WAP.

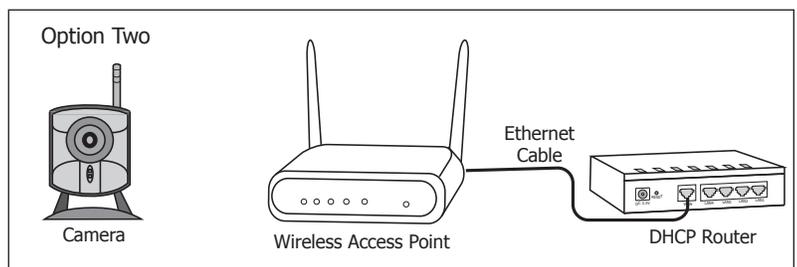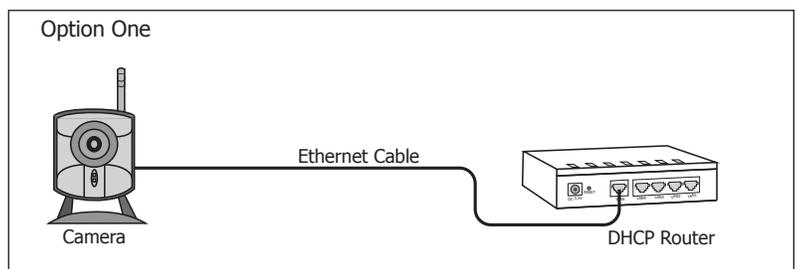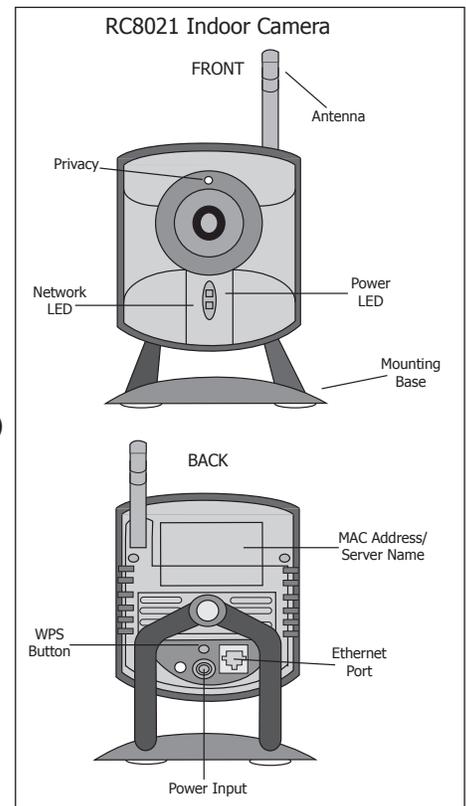

2. Press the WPS button on the front of the WAP for 3 seconds. The Security LED will flash to indicate that the WAP is sending a security key to the wireless camera.

3. Within 1 minute, press and release the WPS button on the back of the camera.

The Network LED turns orange to indicate it is pairing with the WAP. Once connected, the Network LED on the camera turns green and the WPS LED on the WAP turns on solid blue.

4. Repeat steps 1-3 for each camera you will be connecting at this site.

The camera is now ready to be activated through vk.securecomwireless.com.

Option #3 Configuration - Wireless connection using a supported router or WAP:


1. Plug in the power adapter to the camera and to a power outlet. The Power LED will continue to flash until paired with the WAP.

2. For using your own WPS-enabled router, refer to the router's instruction manual to put the router into the mode of sending a security key.

3. Within 1 minute of sending a security key, press and release the WPS button on the back of the camera. This accepts the key and sets up secure communications. Once the communication is established between the camera and the router, the yellow Network LED on the camera and the WPS LED on the WAP will be on solid. This process could take up to 2 minutes.

4. Repeat steps 1-3 for each camera you will be connecting to at this site.

The camera is now ready to be activated through vk.securecomwireless.com.

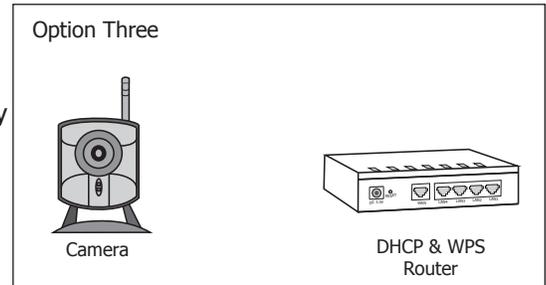

Activating a Camera through SecureCom Wireless

Once communication has been established, a camera can be activated at vk.securecomwireless.com

1. Login with your dealer login information at vk.securecomwireless.com and choose the correct customer.

2. Enable video on the customer's system by pressing on the edit button to the right of the account number of that system. See Figure 1.

This takes you to the system editing screen (Figure 2). Enable video by checking the video checkbox and clicking Save. The System Profile screen will display.

3. From the System Profile screen, press Add New Camera. The New Camera screen (Figure 3) displays to enter the following information:

The screenshot shows the "Customer Profile Screen" for a user named "jay". The interface includes a navigation menu with "Customers", "Your Security Personnel", and "Your Security Settings". The user's profile information is displayed, including email, address, city, state/province, postal code, phone, and security account number. The "Active" checkbox is checked. Below the profile information, there are sections for "App Users" and "Systems".

Email	Last App Access	Delete	Reset Password
jbecker@dmp.com	3 months ago	Delete	Reset Password
jbecker1@dmp.com	11 months ago	Delete	Reset Password
coln.panic@gmail.com	2 months ago	Delete	Reset Password
jbecker2@dmp.com	Never	Delete	Reset Password

Account	Name	App Inactive	Edit	Delete
1-13134	desk.xtl	App Inactive	Edit	Delete
1-13130	home	App Inactive	Edit	Delete
1-13136	network.xt50	App Active	Edit	Delete

Figure 1: Customer Profile Screen

Name: The camera name that displays in the user's app. This can be 16 characters long.

Server Name or MAC Address: This information can be found on the back of the camera. If the MAC Address is listed, the 12 characters that can be entered in this field. If the Server Name is listed, the 8 characters beginning with SC can be entered in this field.

Time Zone: Select the time zone of the camera location. This is used to indicate times of the clips.

Editing jay desk xtl

System Name *

desk.xtl

Postal Code of System

Services

- App
App access is required for the following to be enabled
- Thermostats
- Lights
- Locks
- Allows favorite edit
- Video

Figure 2: System Editing Screen

New camera

Name *

Server Name (SC + 6 characters) or MAC Address (12 characters) *

Time zone *

(GMT-06:00) Central Time (US & Canada)

Observe daylight savings time?

Yes No

Ceiling mount?

Yes No

Clips

Off

On

Scheduled

Figure 3: New Camera Screen

Ceiling Mount?: Select Yes if the camera will be mounted on the ceiling. Selecting Yes will correctly adjust the picture seen on the Virtual Keypad.

Clips: Enable Clips to allow this camera to record motion-triggered video clips to the SecureCom Video server. Choose Off if you only want this camera to offer a live camera view through the Virtual Keypad app.

Choose On if you want this camera to record video clips any time it detects motion.

Choose Scheduled if you want the camera to record motion-triggered clips using a time schedule. This allows you to add a schedule. You can choose to add one schedule for each day, or you can choose 'Everyday' or 'Weekday'.

Shortest Time Between Video Clips: Each DMP video camera can record a video clip as frequently as every 3 minutes. To change from the 3-minute default, you can choose the 4 ,5, or 15 minute option. See Figure 3.

Once you have chosen the desired settings, clicking Save begins the activation process for this camera. You will see a status of 'Activating' next to the camera name. Press the refresh button to display the latest status. When the camera is active and communicating with the SecureCom Video Server, it will have a status of Active.

Viewing the Camera

To view the camera during installation, select the camera name on the Camera Profile Screen to display a live video feed for 60 minutes. This is to allow positioning of the camera to the user's desired location. Once the 60 minutes has past, the camera feed can only be seen through the user's Virtual Keypad App.

Name	MAC Address	Server Name	Activation Status	
HD Aaron Desk	000E8F88C2B3	SC88C2B3	Active	Test Connection
OD Aaron Desk	000E8F92343A	SC92343A	Activating	
SD Aarons Desk	000E8F90F788	SC90F788	Active	Test Connection

[Add new camera](#) | [Refresh](#)

Figure 4: Camera Profile Screen

Emailing Clips

If the user would like to be emailed video clips, enable this option in the Editing User screen (Figure 5). From the Customer Profile Screen (Figure 1) click on the email address to go to the Editing User screen. Checking the Email video clips box sends emails with a video clip attachment to the App user any time the video camera records a video clip to the SecureCom video server.

Editing User

Email *

jay@nowhere.com

Email video clips

Enables access to jay

Figure 5: Editing User Screen

Specifications

Sensor and Lens:

Image Sensor	1/4" CMOS Sensor
Minimum Illumination	0.5 Lux
Video Compression	MPEG-4 SP, M-JPEG
Resolution	320x240
Frame Rate	Up to 30 frames per second.

Network:

Wireless	IEEE 802.11b/g; WEP64/128 bit, WPA/WPA2 Personal, WPS
----------	---

Hardware:

Power Consumption	5V DC / Max 3.4W
-------------------	------------------

Dimensions (HxWxD):

Camera	3.4" x 3.7" x 1.38"
Camera with stand	4.3" x 3.94" x 5.12"

Weight:

Camera	150g (0.33 lb)
Camera with stand	275g (0.61 lb)



800-641-4282

www.dmp.com

Designed, Engineered and
Assembled in U.S.A.

INTRUSION • FIRE • ACCESS • NETWORKS

2500 North Partnership Boulevard

Springfield, Missouri 65803-8877