

COMMUNICATION MODULE Model 984MD


INSTALLATION

The Model 984MD Communication Modules is installed in the upper left hand corner of the COMMAND PROCESSOR. Two tabs located on the left hand side of the Model 984MD plug into slots provided in the inner box. It is then pressed forward until it mates securely with the Communication Module connector. NEVER INSTALL OR REMOVE A COMMUNICATION MODULE WHILE POWER IS APPLIED TO THE PANEL. DMP recommends that connection to the Model 984MD be made with the DMP Model 356 cable. The Model 356 mates with the USOC, RJ31X or RJ38X. Two cables are needed when using the module for multiplex communication with dialer backup.

WIRING

The Multiplex phone line should be connected to the upper jack. The red and green wires are used for connection of the multiplex line.

The dialer phone line should be connected to the lower jack. Phone line seizure is provided when using a standard RJ31X jack from your phone company.

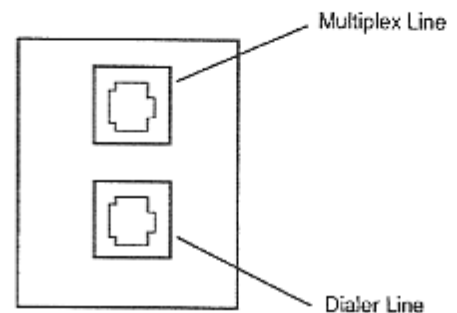

FCC INSTRUCTIONS TO USERS

1. Registered terminal equipment must not be repaired by the user. In case of trouble, the device must be immediately unplugged from the telephone jack. The factory warranty provides for repairs.
2. Registered terminal equipment may not be used on party lines or in connection with coin telephones.
3. Notification must be given to the telephone company:
 - a. The particular line(s) to which the service is connected.
 - b. The FCC Registration Number: CCK8GW-68626-AL-R
 - c. The Ringer Equivalence: 0.0B.
 - d. Make, model and serial number (or date of manufacture) of the device.