

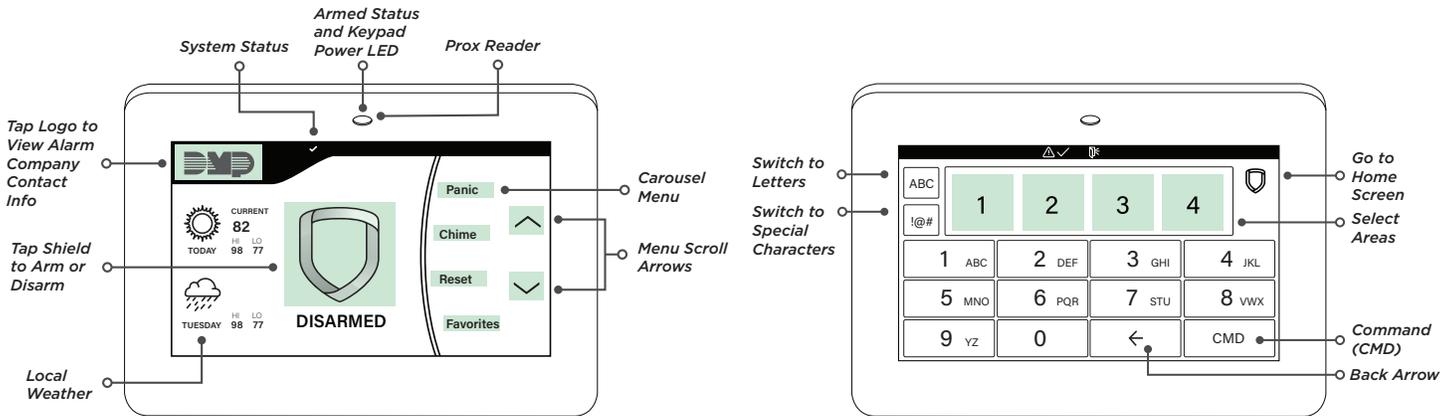
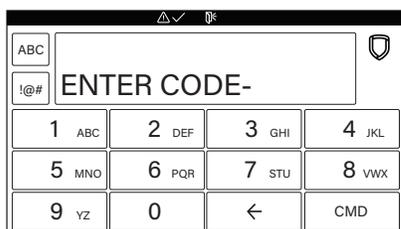


SYSTEM BASICS

All/Perimeter System with Touchscreen Keypad

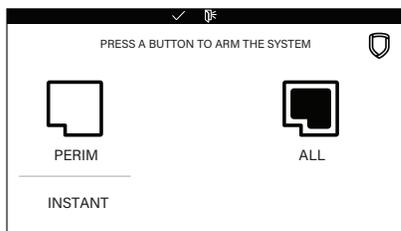

Arm the System

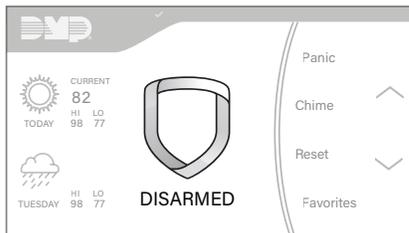

1 Tap the shield in the center of the keypad.

2 If you want to arm only the perimeter, tap the **PERIM** icon.

If you want to arm both the perimeter and the interior, tap the **ALL** icon.

3 If **ENTER CODE** displays, present a credential to the proximity reader, or enter your user code and tap **CMD**.

Faulted Zones

If a problem with a zone occurs while you try to arm, the zone's name and a brief description of the issue are displayed followed by **OKAY BYPASS STOP**.


- ▶ To force arm the zones before arming, tap **OKAY**. The system will arm and the zone that is faulted will become part of the protected area once it returns to a normal state.
- ▶ To bypass the zones before arming, tap **BYPASS**. The system will arm and the zone that is faulted will remain bypassed until the next time the system is armed. Panic, emergency, fire, flood detector, and temperature sensor zones cannot be bypassed.
- ▶ To stop the system from arming, tap **STOP**. Correct the zone problems, then try to arm again.

Disarm the System

During Normal Operation



1 Tap the shield in the center of the keypad.

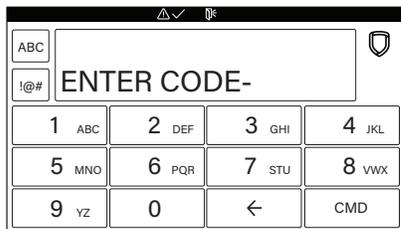


2 At **ENTER CODE**, present a credential to the proximity reader, or enter your user code and tap **CMD**.

During an Alarm



1 Tap the shield in the center of the keypad.

2 At **ENTER CODE**, present a credential to the proximity reader, or enter your user code and tap **CMD**.

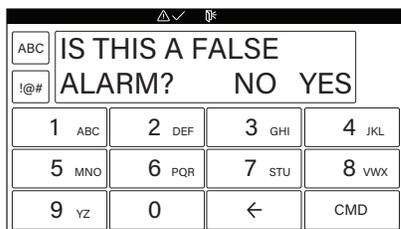

3 The system displays **IS THIS A FALSE ALARM? NO YES**.

- ▶ **Real Alarm:** Tap **NO**. This confirms the alarm and notifies the monitoring center that a real alarm is happening. Your security system stays armed.
- ▶ **False Alarm:** Tap **YES**. This cancels the alarm and sends an abort message to the monitoring center. Your security system disarms.